DABLIUTOUCH

Mod. L1R | PRO

4K ULTRA HD

wacebo

Android 14 | 8 GB | 256 GB | 65" | 75" | 86" | Google EDLA

	65"	75"	86"
Display Area	432×815 mm	1651×928 mm	1895×1065 mm
Contrast Ratio	5000:1	5000:1	4000:1
Brightness(typ)	450 cd/m2	450 cd/m2	450 cd/m2
Dimensions	1489 × 897.9 × 85 mm	1710 × 1022 × 85 mm	1953.74 × 1159.41 × 88.1 mm
Pack Dimensions	1657 × 185 × 1007 mm	1873 × 1134 × 202 mm	2110 × 222 × 1270 mm
Wall-hanging Screw	M8×20mm	M8×20mm	M8×20mm
Net Weight	31.6 KG	43.55 KG	55.82 KG
Gross Weight	42.12 KG	57.4 KG	158.44 KG
VESA	600×400mm	800×400mm	800 ×600mm
Requirements	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A
Consumption (Max)	450 W	480 W	550W
Consumption (Standby)	≤0.5W	≤0.5W	≤0.5W

Display

Screen Type	TFT LCD
Aspect Ratio	16:9
Viewing Angle	178°
Resolution	4K UHD (3840 × 2160 @ 60 Hz)
Back Light Unit	DLED OD20
Color Glamut	NTSC 72%
Response Time	6.5 milliseconds or less
Refresh Rate	60Hz
Display Color	1.07Billion
Glass Hardness	9H (pencil), 7 (Mohs)
Glass Type	AG Glass 3mm
Bonding Type	Zero bonding

Computing

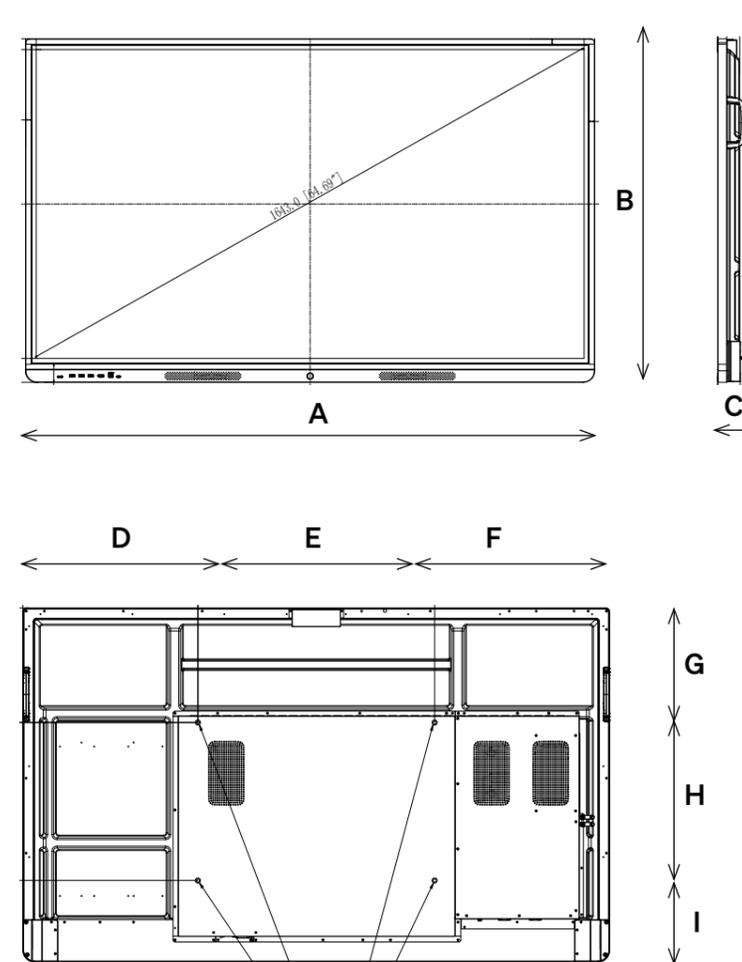| Operating System	Android™14
RAM	8GB
ROM	256GB
Chip	RK3576
CPU	A72*4+A53*4
GPU	Mali G52 MC3
OTA	Yes
WIFI&Blue tooth	Dual WIFI6+BT5.2
OSD	German, English, Spanish, French, Italian, Hungarian, Croatian, New Zealand language, Arabic, Russian.10 languages

Included accessories

Pen x2 , remote control x1, wall mount x1, power cable x1, manual x1, Usb touch cable x1, HDMI cable x1

Interactivity

Touch Points	50
Touch Technology	IR
Touch Accuracy	1mm 90% Central area
Max T. Resp. Time	5 milliseconds
Tracking Rate	≥5m/s
ScanRate	200 Hz
Pen Type	Battery-less
Pen Holder	yes
Pen Identities	3 mm
Touch Hight	1.5mm
Compatibility*	Windows® 7-10 OS X® 10.8 to 10.11	macOS® Sierra 10.12.1® or later Linux® Ubuntu® 18.04 LTS Chrome OS™

Interface (Front)

Type C PD 100w	1
USB 3.0	3
Touch USB 2.0	1
HDMI-IN 2.0	1

Audio

Speaker	Face to front
Power	2*20W

Optional module OPS

(120 × 180 × 30 mm)

Interface (Rear)

USB3.0	2
USB2.0	1
Touch USB3.0	2
Type C PD 15w	1
DP IN	1
HDMI IN 1.4	1
HDMI IN 2.0	2
RS232	1
RJ45 1000M	2
HDMI OUT	1
SPDIF OUT	1
Line OUT	1
Mic IN	1
Audio IN	1
VGA IN	1
OPS slot 80pin	1
WIFI&Blue tooth	Dual WIFI6+BT5.2

Environmental

Operating Temperature	0℃- 40℃
Storage Temperature	-20℃-60℃
Operating Humidity	20%~80%RH
Storage Humidity	20%~80%RH

Technical drawings

	65" mm	75" mm
A	1487,2	1708,9
B	897	1021,7
C	87,8	87,9
D	443,6	454,5
E	600	800
F	443,6	454,5
G	290,2	212,5
H	400	400
I	206,8	409,2

	86" mm
A	1953,74
B	1159,41
C	88,1
D	576,87
E	800
F	576,87
G	305,81
H	600
I	253,6